

SeaBat® T20-ASV

High resolution multibeam echosounder

Superior multibeam technology engineered for uncrewed and autonomous platforms

The SeaBat® T20-ASV is built around the renowned SeaBat® T20 and maintains the incredible SeaBat® data quality in a smaller form factor. Now, optimized power requirements ensure extended and crucial mission time on battery-powered vehicles.

The SeaBat® T20-ASV includes the unmatched Tracker Autopilot offering truly autonomous sonar operation without sacrificing resolution or speed.

Internal storage, integrated data acquisition software and the latest developments in integrated INS completes the survey solution.



SeaBat® T20-ASV:

ASV Sonar Processor:

- OEM integrated on the vehicle
- Internal dry cables to bulkhead
- Easy to use Amphenol connectors

Sonar head

- 190 – 420kHz frequency agile
- Robust titanium housing
- Customized cables to accurately match vehicle


PRODUCT FEATURES & BENEFITS

Features

- **Sonar User Interface** – highly configurable to help you complete the job.
- **Tracker Autopilot** – unmatched truly autonomous sonar operation. Automatic optimization of sonar settings for optimal survey efficiency.
- **Internal storage** – log your survey results directly on the fast internal SSD.
- **Data products** – bathymetry, backscatter, sidescan, full or compressed water column. Record in parallel bathymetry, Snippets backscatter, sidescan backscatter, water column backscatter (full or compressed), without compromising pingrates.

Optional extra features

- **Integrated Inertial Navigation System** – the very latest in INS development, fully integrated in the sonar processor
- **Multi-Detect** – multiple detections for enhanced detail over complex features and water column targets
- **FlexMode** – increase data density where you need it most
- **Pipe Detection & Tracking** – unique to SeaBat, optimize detection of pipes
- **Normalized Backscatter** – for stable and sharp backscatter data

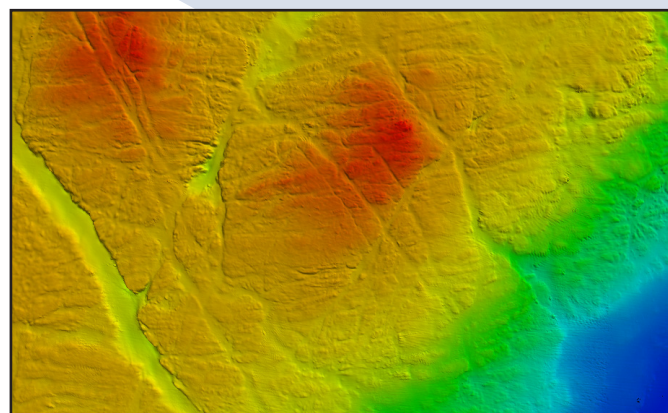

SeaBat® T20-ASV is designed for and offered to selected manufacturers of uncrewed and autonomous platforms.

Contact your local Teledyne Marine representative for information about which selected ASV manufacturers currently offer the SeaBat® T20-ASV.



TELEDYNE MARINE
 RESON
 Everywheryoulook™



SeaBat T20-ASV High resolution multibeam echosounder

SEABAT T20-ASV SYSTEM SPECIFICATIONS

Input voltage	24VDC or 100-230VAC 50/60Hz
Power (typical / max)	90W / 110W
Ingress protection	IP21
TRANSDUCER CABLE LENGTH	Optimized depending on ASV integrator
Temperature (operational)	Processor: -5°C to +45°C Wet-end: -2°C to +36°C
Temperature (storage)	Processor/wet-end: -30°C to +70°C

	height [mm]	width [mm]	depth [mm]	weight [kg/air]	weight [kg/water]
T20 Rx (EM7219)	102.0	254.0	123.0	5.0	2.2
T20 Tx (TC2181)	86.6	93.1	280	5.4	3.4
ASV Sonar Processor	150	328	248 (incl. handles)	6.4	N/A

T20 Acoustic performance	400kHz (max. frequency)	200kHz (min. frequency)
Across-track receiver beam width¹	1° (center)	2° (center)
Along-track beam width¹	1°	2°
Number of beams	Min 10, Max 1024	
Swath coverage (up to)	140° Equi distance, 170° Equi Angle	
Typical Depth (CW)²	Up to 140 meters	Up to 275 meters
Max Depth (CW)²	200 meters	420 meters
Typical Depth (FM)²	Up to 150 meters	Up to 310 meters
Max Depth (FM)²	240 meters	450 meters
Ping rate (range dependent)	Up to 50 pings/s	
Pulse length (CW)	15 – 300µs	
Pulse length (FM)	300-2000µs	
Depth resolution	6mm	

For relevant tolerances for dimensions above and detailed outlined drawings see Product Description

¹ Nominal values

² This is a depth range within which the system is normally operated, from the minimum depth to a depth value corresponding to the max. swath -50%.

³ This is the single value corresponding to the depth at which the swath is reduced to 10% of its max. value. For actual swath performance refer to Product Description.

⁴ An extinction coverage of +/-20° is observed at about 530 meter water.

T20-ASV BASE SCOPE OF SUPPLY

- ASV sonar processor with integrated INS Type-20
- Receiver EM7219
- Projector TC2181
- Teledyne IMU Type-20
- Software and shipping cases etc.

VEHICLE SPECIFIC INTEGRATION KIT*

- Mounting bracket
- RESON SVP70 sound velocity probe
- Payload compartment connection cables
- Custom length wet cables
- Nuts'n'bolts

*Content of integration kit varies with vehicle



TELEDYNE MARINE
RESON
 Everywherelook™

www.teledynemarine.com/reson

Tel. +45 4738 0022 (Europe) • Tel: +1 805 964 6260 (USA)

Email: reson@teledyne.com