

LUXUS Compact LED



The LUXUS Compact LED light is ideal for diving applications. The LED has an output of 440 or 780 lumen and is available with different reflectors. The LUXUS Compact LED is a wet and dry light and can be used from 4,000 metres depth up to the deck without needing to be switched off. The electronics have an auto resetting thermal protection switch that protects the LED and LED driver from high temperatures.

The LUXUS Compact LED can be dimmed with a reference voltage of 0 to 5 VDC, 0 to 10 VDC or with a variable resistor and can be powered with a wide DC range from 15 to 32 VDC. The LUXUS LED driver can be built into the LED light or placed in an external controller, allowing the light to be operated using only 2 wires. The light is delivered with SubConn® or alternative customer specified connectors.

The LUXUS Compact LED is the smallest LED light in the LUXUS range and is designed to function perfectly in combination the LUXUS Compact Camera and LUXUS Compact Media Controller.

The housing is made from sandblasted titanium and has a depth rating of 4,000 metres.

Features and benefits



- Lightweight
- Compact
- Wet and dry
- 4,000 m depth rating
- Thermal protection

Applications

- Diving applications
- General underwater inspection
- ROV systems
- ROV manipulator systems
- Trencher systems
- Crawler systems
- Tether management systems
- Tow and drop camera systems
- Benthic sledge systems
- Underwater observatory systems
- Winch and deck lighting

Options

- 440 lumen or 780 lumen version
- A range of different reflectors
- Alternative connectors
- Custom wiring
- LUXUS helmet mounting bracket
- LUXUS universal mounting bracket
- LUXUS pistol grip bracket
- LUXUS dovetail bracket
- Integrated brackets

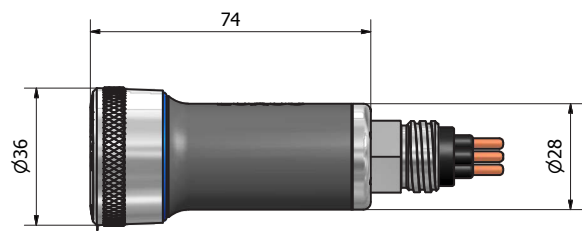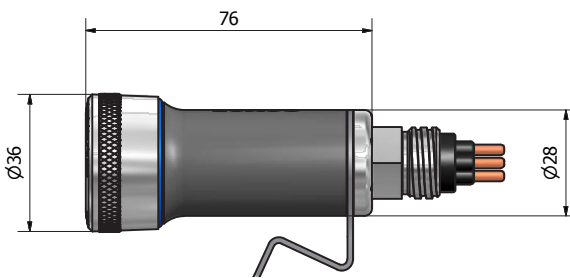

Specifications

Electrical

440 version

Output: 440 lumen
Power supply: 15 - 32 VDC

780 version

Output: 780 lumen
Power supply: 24 - 32 VDC

Power consumption: 5 W
Dimming: 0 - 5 VDC, 0 - 10 VDC
or 5 kΩ potentiometer
Standard wiring:
1 Power +
2 Power Gnd
3 Dimming (5 VDC)

Mechanical

Material: Titanium
Standard connector:
SubConn® MCBH2M
(external LED driver)
SubConn® MCBH3M
(internal LED driver)

Other connectors: On request
Dimensions: See drawing (mm)
Weight: 200 g in air
135 g in water
Window/Lens: Borosilicate glass
Thermal protection: Yes, auto resetting

Optical

Beam angle air: 33°, 47° or 65°
Beam angle water: 25°, 35° or 50°
Output: 440/780 lumen
Typical colour temperature: > 5,600 °K

Environmental

Depth rating: 4,000 m
Test pressure: 600 bar
Storage temperature: -30 to +70 °C
Operating temperature: -15 to +50 °C