

LUXUS Compact Long Line Driver Camera



The LUXUS Compact Long Line Driver Camera is a LUXUS Compact Camera fitted with a video signal amplifying unit. This unit increases the signal and compensate losses when the camera is used with extensive cable lengths for applications that do not involve telemetry.

Upon request, all LUXUS Cameras (except the HD models) can be fitted with the long line driver amplifying unit.

The LUXUS Compact Long Line Driver Camera has a fixed focal length which can be factory adjusted to capture images at very close range. The camera consumes just 2 W and can handle DC power units from 12 to 24 VDC. The camera is delivered with SubConn® or alternative customer specified connectors.

The LUXUS Compact Long Line Driver Camera is designed to function perfectly in combination with the LUXUS Compact LED and LUXUS Compact Media Controller.

The camera housing is made from sandblasted titanium and has a depth rating of 4000 metres.

Features and benefits


- Lightweight
- Compact
- 4,000 m depth rating
- Able to handle long cable lengths (up to 750 m)

Applications

- Diving applications
- Extended diver umbilicals
- General underwater inspection
- Tow and drop camera systems
- Benthic sledge systems

Options

- A range of lenses
- Alternative connectors
- Custom wiring
- NTSC or PAL
- LUXUS helmet mounting bracket
- LUXUS universal mounting bracket
- LUXUS pistol grip bracket
- LUXUS dovetail bracket

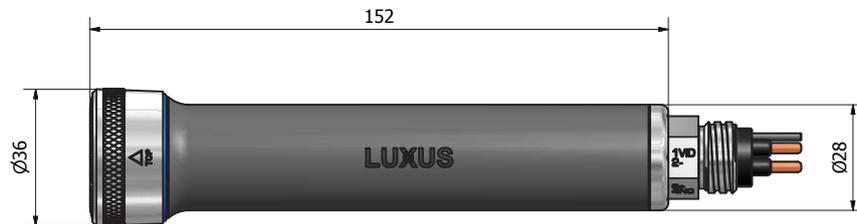

Specifications

Electrical

Power supply:	12 - 24 VDC
Power consumption:	2 W
Output:	Video Composite 1 Vpp
Signal to noise ratio:	>52 dB
Standard wiring:	1 Video hot 2 Power Gnd/screen 3 Power + 4 NC

Mechanical

Material:	Titanium
Standard connector:	SubConn® MCBH4M Ti
Other connectors:	On request
Dimensions:	See drawing (mm)
Weight:	310 g in air 215 g in water
Window/Lens:	Borosilicate glass

Optical

Sensor:	1/3" Exview HAD CCD
Angle of view (horizontal):	
Air:	Standard 120°
Water:	Standard 90° (Other angles optional)
Sensitivity:	0.1 lux
Min. focus distance:	10 cm
Zoom:	No
Iris:	No
Focus:	No
TV lines:	650

Environmental

Depth rating:	4,000 m
Test pressure:	600 bar
Storage temperature:	-30 to +70 °C
Operating temperature:	-10 to +50 °C